

# DMX-LINK

## Back-up Console



- Soft-patching of 1024 channels to 1024 dimmers at any level
- DMX mixing of 2 external DMX inputs
- Channel capacity can be configured between the 2 DMX inputs
- Patch storage for 4 independent Soft-patch lists
- 10 pages of 10 Back-up masters for 100 back-up scenes
- Keypad channel access for scene programming or editing
- Instant to 60 minute fade time for back-up scene playback
- 6 independent House Light faders with master fader

E-mail: [info@theatrelight.co.nz](mailto:info@theatrelight.co.nz)  
6 Rowe St., Onehunga, Auckland, New Zealand  
Tel: 64-9-622 1187, Fax: 64-9-636 5803  
Web: [www.theatrelight.co.nz](http://www.theatrelight.co.nz)

**THEATRELIGHT NZ**


## Soft-Patch and Back-up Console

# DMX-LINK

The Theatrelight DMX-Link is a powerful and affordable control desk with a sophisticated DMX mixing, Back-up recording, and Soft-patch facilities. As well as acting as a Back-up and patching desk to other control panels, the DMX-Link can also be used as a compact standalone memory lighting desk for the control of large permanent lighting installations in venues such as Concert Halls, Television Stations and Stadiums.

### FEATURES

- Soft-patch 1024 channels to 1024 dimmers at any level
- DMX mixing of 2 external DMX inputs
- Channel capacity can be user configured between the 2 DMX inputs
- Patch storage for 4 independent Soft-patch lists
- 100 back-up scenes of up to 1024 channels in 10 pages of 10 Back-up masters
- Keypad channel access for all programming or editing
- Instant to 60 minute fade time for back-up scene playback
- Record and Erase protection codes
- 6 independent House Light faders with master fader

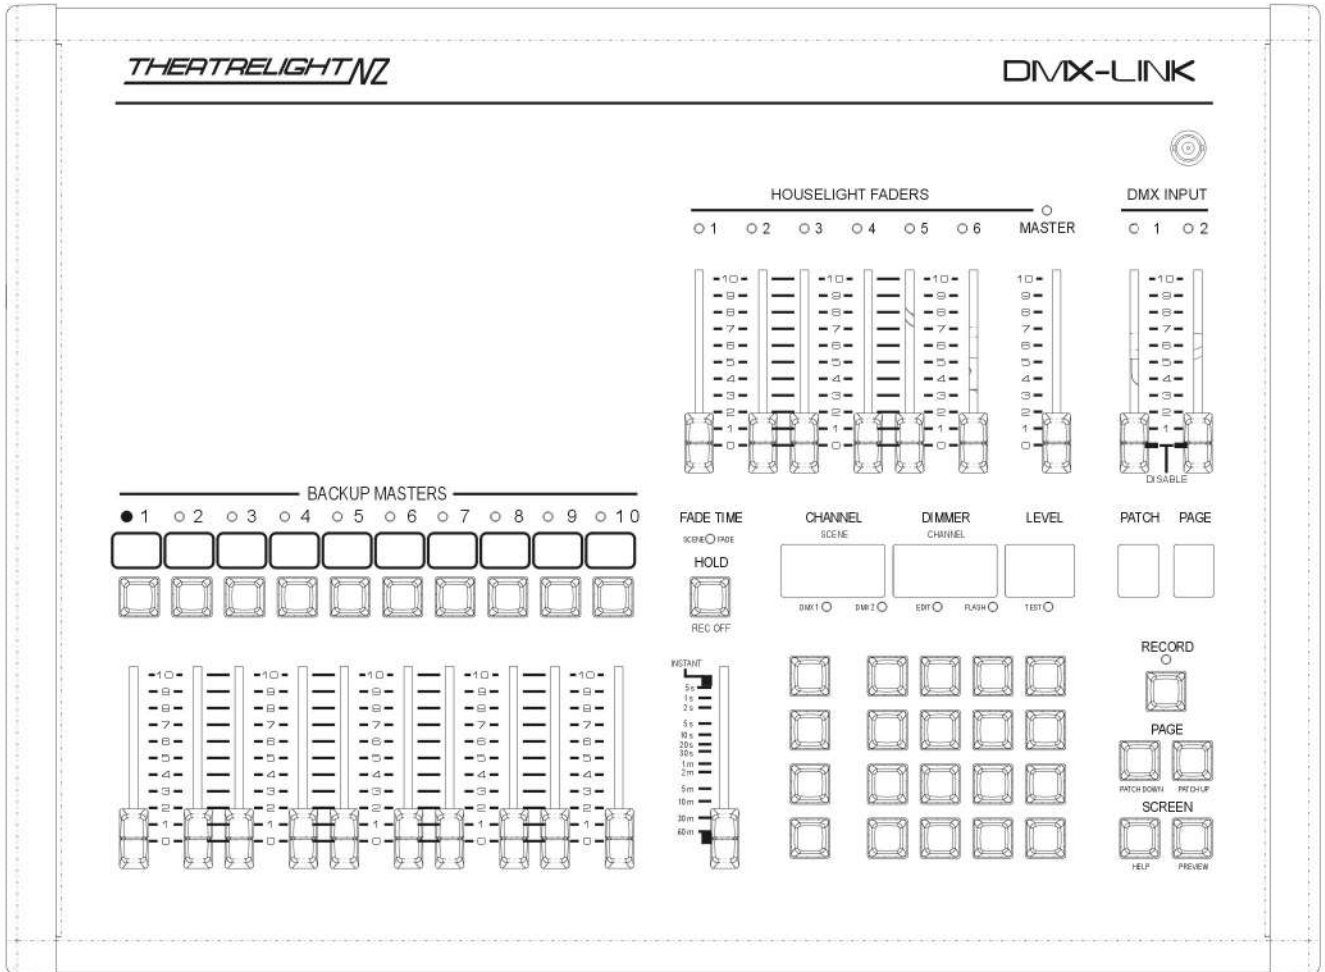

### Specifications

**Construction:** Powder coated corrosion protected steel frame

**Faders:** 60mm stroke linear faders with custom moulded ABS knobs

**Flash Keys:** Long life heavy duty computer keys with ABS caps

**Electronics:** CMOS micro-processor with 5 year lithium backup battery CMOS memory


**Power Supply:** 100~120 or 220~240VAC with 4 pin male XLR power socket via external 4 pin XLR plug 100~120 or 220~240VAC

**Control Output:** DMX-512 USITT (1990) Digital Multiplex System via 5 pin XLR male socket

### Dimensions

**Model**  
DMX-LINK

**Length Weight**  
474mm 6Kg

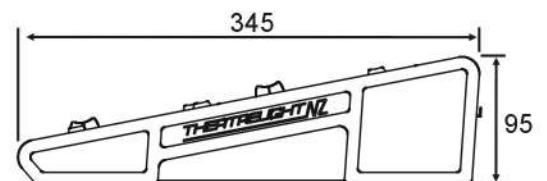

Your Local Distributor:

## THEATRELIGHT NZ

Theatrelight Ltd, 6 Rowe St. Onehunga, Auckland, New Zealand  
Tel: 64-9-622 1187, Fax: 64-9-636 5803  
Internet: [www.theatrelight.co.nz](http://www.theatrelight.co.nz), e-mail: [info@theatrelight.co.nz](mailto:info@theatrelight.co.nz)